

פנל 3 לחצנים - חכם, חיווי מצבי פעולה מואר לכל לחצן, מקלט אינפרא מובנה להפעלה באמצעות שלט חכם G4, הפעלות מקומיות ו/או תרחישים. אפשרות לדבל קליק (לחיצה כפולה). כניסת מיני USB חיצוני מאפשר עדכוני תוכנה.

technical data



Added features

- Lockable keys/ buttons
- Lockable IR receiver
- Changeable fascia colors
- LED backlit buttons and LCD
- Reloadable IR receiver 15m
- Screw less mounting
- Easy sBUS connector tech.

Control Applications

- lighting, security arming, motorized shades, moods and scenes, on/off music, fountains, irrigation, gates, LED color, service request, panic, lifts, fountains, gates..etc.

User Controls

- user control buttons
- Diagnostics + BROADCAST

Button behavior

- Single click (on/Off toggle)
- Double click (mood/Macro)
- Keep press (dim/ramp)

Programming

- Manual Pairing to Lighting,
- Advanced Software Configuration & Programming

Compliance

- CE Mark EMC
- ROHs, CPT

Total Gangs

3 gangs

Control IO

- 1 x Advanced RS485 S-BUS serial port links (both train & screw link types)

Upgrade IO

- 1 x mini USB port (to connect to special programming board)

Operation Protection

- BUS Rv. Polarity Protection
- BUS Short Circuit Protection

SBUS DC Supply

- 24VDC with flexible tolerance between 8-32VDC. Flexible ability to add power supply as to be needed any where
- Power consumption: 25mA

Installation

- wall Mount metal frame twist
- Magnetic screw less mounting
- Advanced security locking
- Easy sBUS connector tech.

Operating Environment

- 0° to 45°C ambient temperature
- 20% to 93% RH

Enclosure material

Aluminum, Glass, and poly

Dimensions & Weight

W85mm x L85mm x H12mm x D8mm. Backed weight 0.2 kg



control compatibility

- Lighting
- Music
- Curtains
- Moods
- Security
- Service
- Color
- Drapes
- Pumps
- Gates





GTIN (UPC-EAN): 0610696254283
Patent P. No: 201110123081.0



connection diagram


mounting dimensions

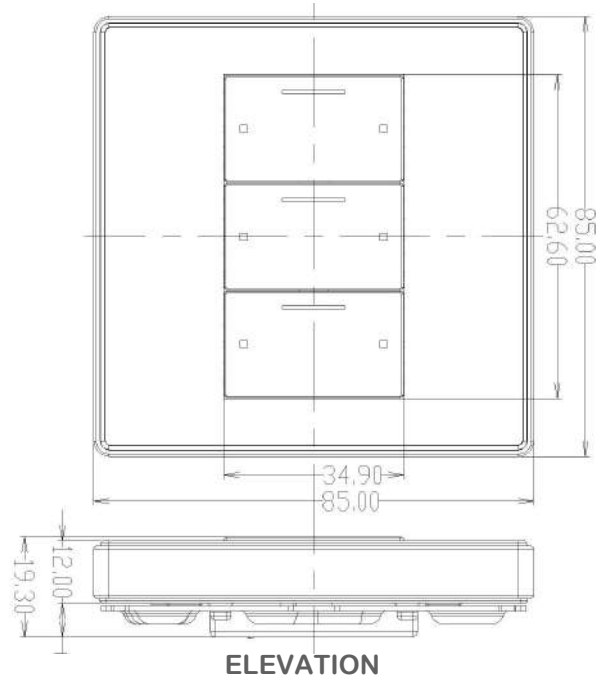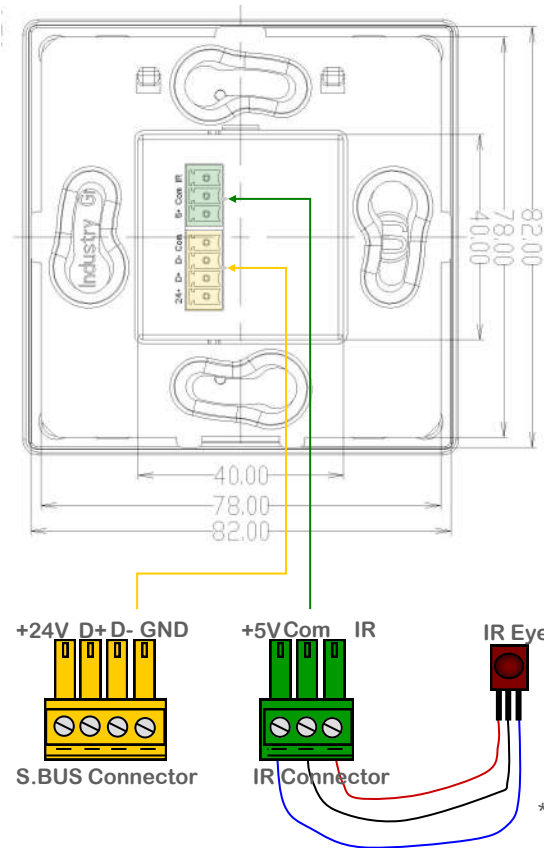

*IR Expansion Cable Tested at 15 Meters & found Perfectly operational




PROSPECTIVE

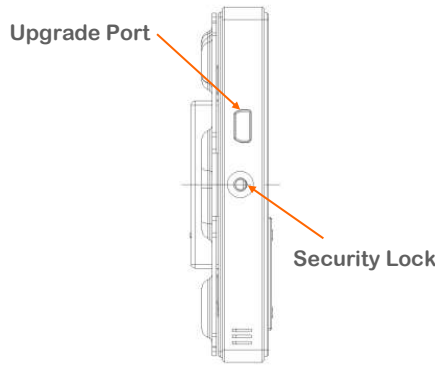

SIDE VIEW

S-BUS connection

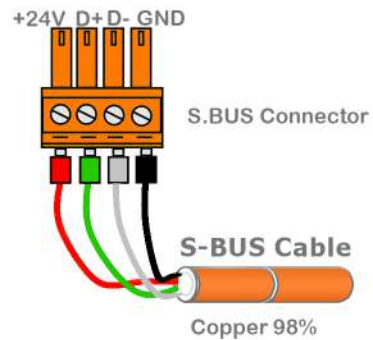

UTP core colors

S.BUS +24V	—	כתום
S.BUS GND	- - -	כתום / לבן
S.BUS D+	—	כחול
S.BUS D-	- - -	כחול / לבן
Spare	—	ירוק
Spare	- - -	ירוק / לבן
Spare +12v	—	חום
Spare -12V	- - -	חום / לבן