

פנל מגע חכם, מסך LCD מובנה, 16 לחצנים להפעלות מקומיות ו/או תרחישים. ממשקים מובנים לפיקוד על מיזוג, אודיו, חימום ורצפתי. מקלט אינפרא מובנה להפעלה באמצעות שלט חכם. חיווי מצבי פעולה - מואר, אייקונים ו/או כיתוב בכל שפה. אייקונים מובנים למעבר נוח ומהיר בין הדפים.

technical data



Screen Pages

Total 13 pages, (4 flexible use)
9P for HVAC (1 Master+8 Slave)
1P for Music
1P for Floor Heating/Cooling

Extra features

Lockable keys/ buttons
Calibrate able temperature +5-
Colorful LED backlight and LCD
Reloadable IR receiver 15m
Screw less mounting
Easy sBUS connector tech.

Control Applications

lighting, HVAC, security, motorized shades, music, moods and scenes, fountains, irrigation, gates, LED color, service request, panic, code entry, lifts, media equipment...etc.

User Controls

- user control buttons
- Diagnostics + BROADCAST

Button behavior

Single click (on/Off toggle)
Double click (mood/Macro)
Keep press (dim/ramp)

Programming

- Manual Pairing to Lighting, HVAC and Audio modules
- Advanced Software Configuration & Programming

Compliance

CE Mark EMC
ROHs, CPT

Total Gangs

This DDPU is equal to 120 gangs

Control IO

1 x Advanced RS485 S-BUS serial port links (both train & screw link types)

Upgrade IO

1 x mini USB port (to connect to special programming board)

Operation Protection

- BUS Rv. Polarity Protection
- BUS Short Circuit Protection

SBUS DC Supply

24VDC with flexible tolerance between 8-32VDC. Flexible ability to add power supply as to be needed any where
Power consumption: 25mA

Installation

- wall Mount
- Magnetic screw less mounting
- Easy sBUS connector tech.

Operating Environment

0° to 45°C ambient temperature
20% to 93% RH

Enclosure material

Glass, and poly

Dimensions & Weight



control compatibility

• Lighting • Climate • Music • Curtains • Moods • Media
• Security • Service • Color • Drapes • Pumps • Gates



commercial

GTIN (UPC-EAN): 0610696254030
Patent P. No: 201110123081.0
Patent . No: 201120213397.4




[Adam Toledano](#)


connection diagram

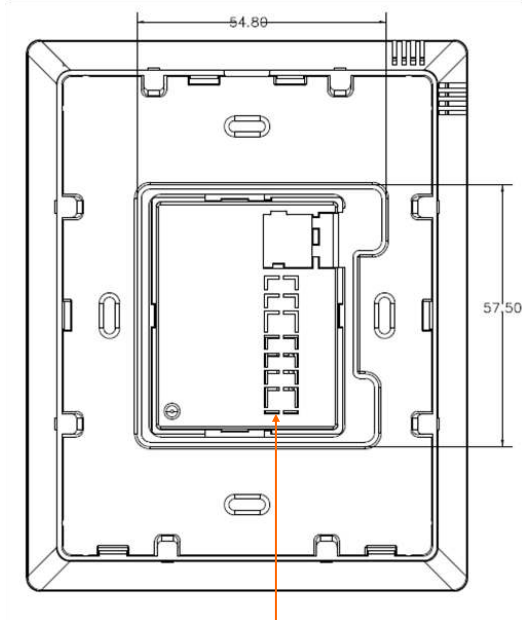

mounting dimensions

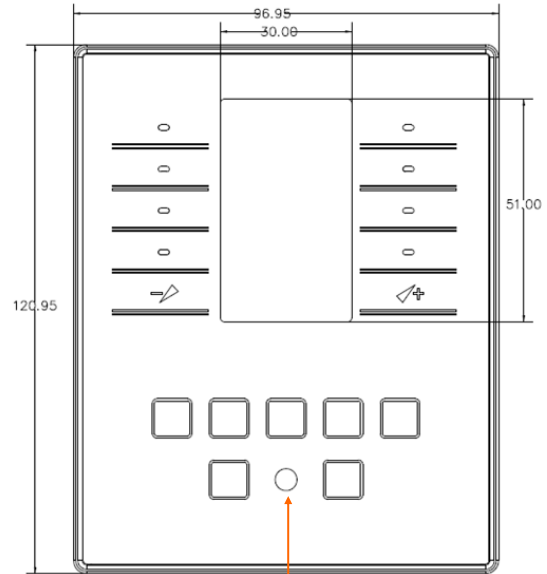


מקלט IR



ELEVATION

*IR Expansion Cable Tested at 15 Meters & found Perfectly operational




PROSPECTIVE



SIDE VIEW

S-BUS connection

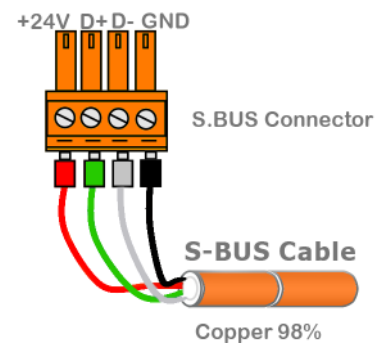

UTP core colors

S.BUS +24V		אדום
S.BUS GND		שחור
S.BUS D+		ירוק
S.BUS D-		לבן