

מרכזיית חיבורים. BUS CABLE להתקנה על פס דין.
9 כניסות לחיבור כבלי תקשורת S-BUS.

technical data



Compatibility
Mainly Cat5 and Cat6,
KNX Cables
AWG 14 cables

Power
S-BUS Pass Through

Ports
1X4D Male for Train / cascade
1X4D Female for Train cascade
8X4D Male for Cables Manage

Human Interface
LED Indicator for Power OK

Compliance
CE Mark EMC
ROHs, RS

SBUS DC Supply
24VDC

Installation
• 35mm DIN-Rail Mount Ready
• Wall Mount Ready (4P)

Operating Environment
0° to 45°C ambient temperature
20% to 93% RH

Enclosure & Size
APS Polycarbonate,
DIN-rail (4 Unit)





Dimensions & Weight
W 91mm x L 73mm x H 75mm
Packed weight 0.26 kg

Applications


24VDC Power Supply Needs
Medical Equipment and Application Compliant

connection diagram

mounting dimensions

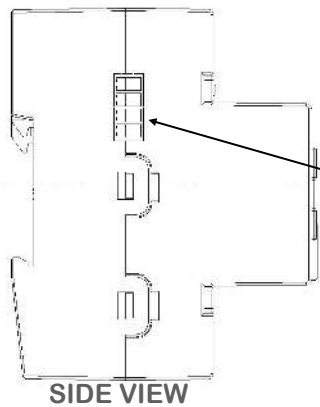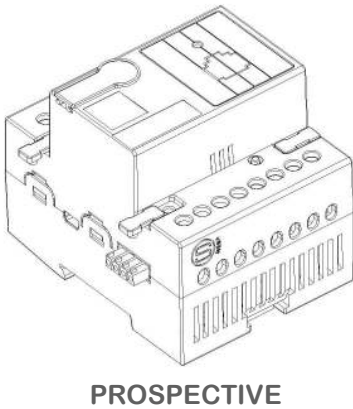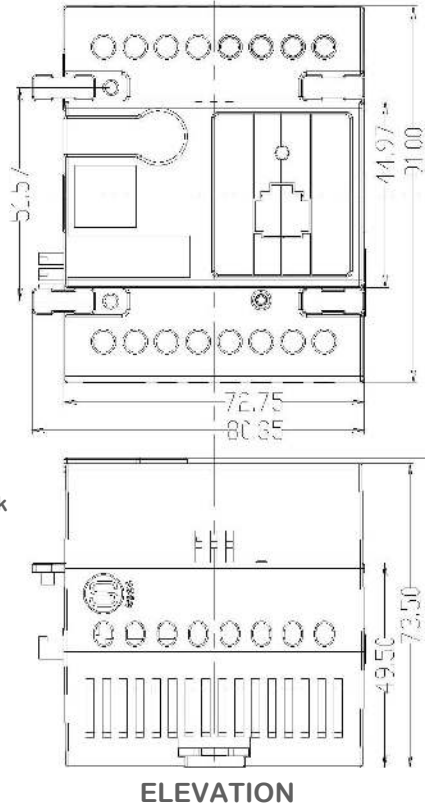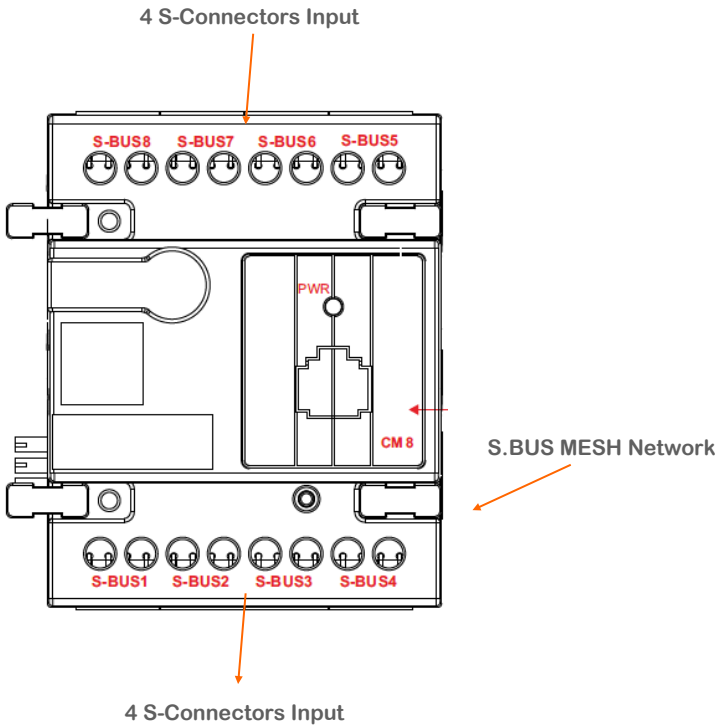

S-BUS connection

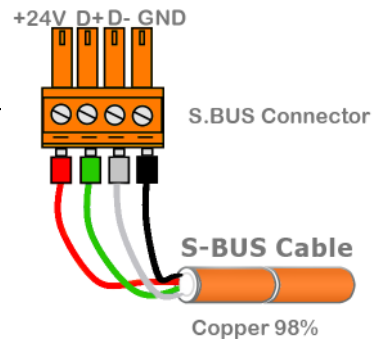

UTP core colors

S.BUS +24V		אדום
S.BUS GND		שחור
S.BUS D+		ירוק
S.BUS D-		לבן