

ניתוק/חיבור חשמל בחדר בהתאם למצב כרטיס האורח בפנל הכרטיס בחדר. ממסר מובנה 25 אמפר לניתוק מערכת החשמל.

ממסר מובנה לחיבור פעמון חיצוני. ספק כח מובנה 12 וולט לחיבור גלאים חיצוניים.

### technical data



### Features

- Power Off Delay (Delay Time Programmable)
- Power On Moods up to 10
- Each mood programmable instructions up to 10

### Control IO

- 2 x Advanced RS485 S-BUS serial port links (train types)
- 1 x 30A Relay for total power of the GRM control
- 1 x 5A relay for door bell control
- 1 x power output port (650ma/24VDC)

### Upgrade IO

- 1 x mini USB port (to connect to special programming board)

### Programming

- Advanced Software Configuration & Programming

### Compliance

- CE Mark EMC
- ROHs
- UL Listed Relays Inside

### SBUS DC Supply

24VDC with flexible tolerance between 8-36VDC. Flexible ability to add power supply as to be needed any where  
Power consumption: 20mA

### Installation

- 35mm DIN-Rail Mount Ready
- Wall Mount Ready (4P)

### Operating Environment

0° to 45°C ambient temperature  
20% to 93% RH

### Enclosure material

Aluminum, Glass, and poly

### Dimensions & Weight

L73mm x W91mm x H73.5mm  
weight:0.39kg




### control compatibility

- Smart Hotel all other module




GTIN (UPC-EAN): 0610696254382  
Patent P. No:


### connection diagram

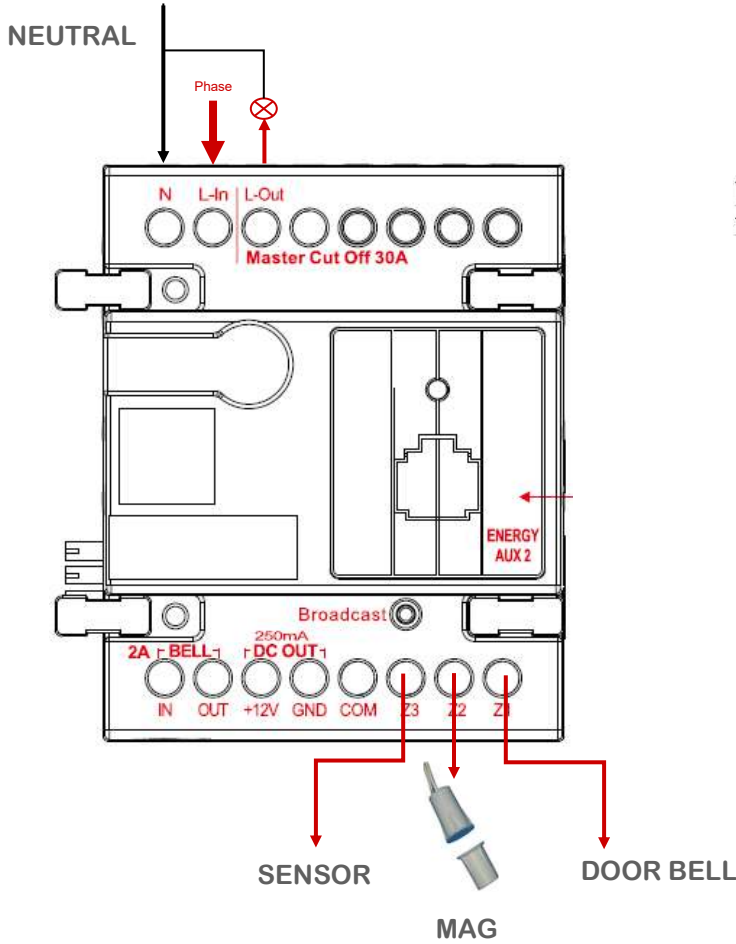

### mounting dimensions

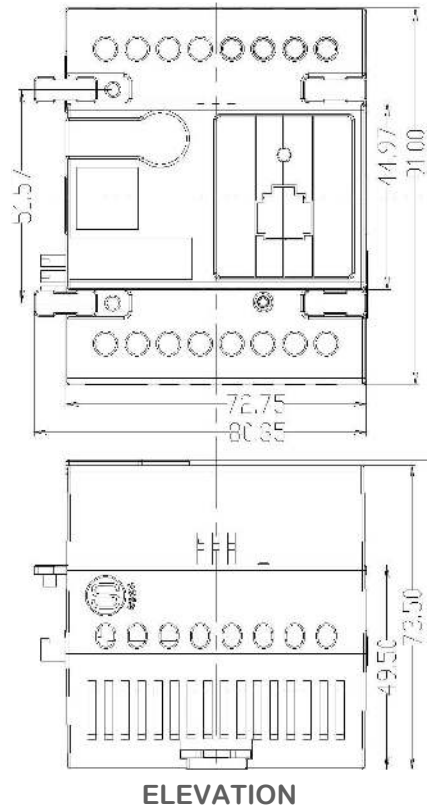

### S-BUS connection

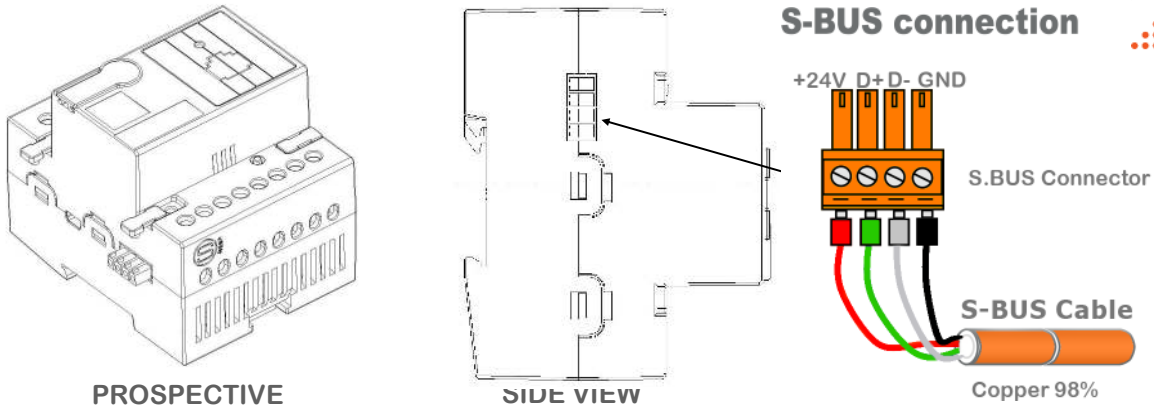

### UTP core colors

S.BUS +24V		אדום
S.BUS GND		שחר
S.BUS D+		ירוק
S.BUS D-		לבן