

בקר מגעים יבשים - חיבור של עד 4 כניסות מגע יבש. לחצן מגע יבש יכול להפעיל ערוץ בודד או תרחיש. מותאם להתקנה מאחורי קופסת המתגים. מתאים לחיבור מערכת אזעקה, מתגים, לחצנים ומערכות חיצוניות שונות. תרגום פקודות מגעים יבשים לתקשורת באס. כניסת מיני USB חיצוני מאפשר עדכוני תוכנה.

technical data



Inputs

4-Dry Inputs (Volt Free)

NO/NC

Internal Assignment enabled using Software setup

Applications

- Security Applications in connection to: (vibration, UV, magnetic contacts, Panic, Pressure matt, PIR, microwave, Drive-way sensors...etc.)
- Safety Applications in connection to: (Gas Leak, Smoke, Pool Guard, Elevator Panic, CO gas, Bathroom Help..etc.)
- Maintenance and Health Applications in connection to: (water Leak detector, water tank low level alert, Filter clogged sensor...etc.)
- Converting Manual Wall Switches into Automation enabled

User Controls

- LED status indicator/channel
- Diagnostic LED+ BROADCAST

Programming

- Advanced Software Configuration & Programming

Compliance

CE Mark EMC

Control IO

1 x Advanced RS485 S-BUS serial port links (both train & screw link types)

Upgrade IO

1 x mini USB port (to connect to special programming board)

Operation Protection

- BUS Rv. Polarity Protection
- BUS Short Circuit Protection

SBUS DC Supply

24VDC with flexible tolerance between 8-36VDC. Flexible ability to add power supply as to be needed any where
Power consumption: 12mA

Installation

- universal Mount Ready

Operating Environment

0° to 45°C ambient temperature
20% to 93% RH

Enclosure material

Polycarbonate

Dimensions & Weight

W 46mm x L 46mm x H 16mm
Packed weight 0.06 kg






- Security • Safety • Maintenance • Health
- Converting normal switches into automated ones



GTIN (UPC-EAN): 0610696254023
Patent P. No: 201110123081.0



connection diagram

mounting dimensions

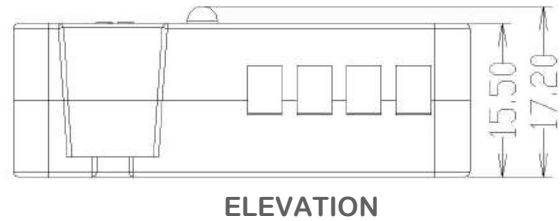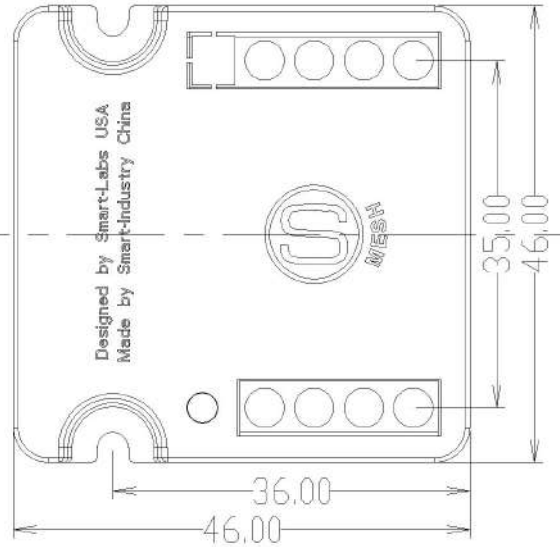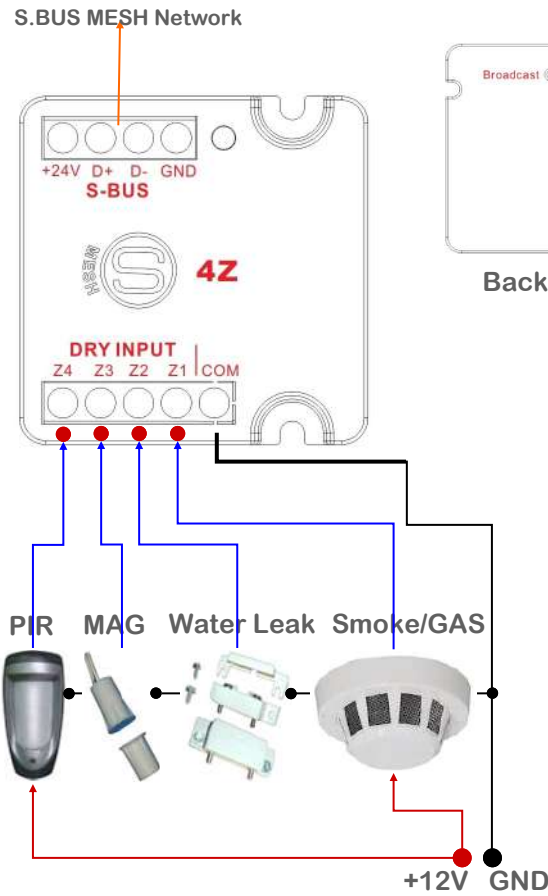

*Sensor Expansion Cable Tested at 300 Meters & found working perfectly

S-BUS connection

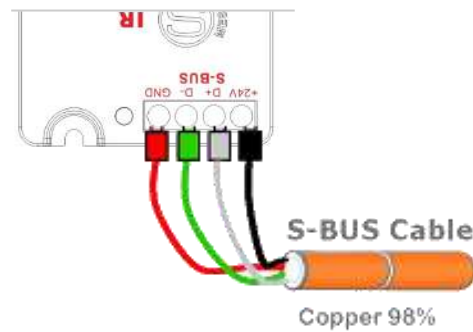

UTP core colors

S.BUS +24V	— אדום
S.BUS GND	— שחר
S.BUS D+	— ירוק
S.BUS D-	— לבן